

# G | LUBE EM B

Battery-operated high pressure  
lubrication system



**GRUETZNER**  
AUTOMATIC LUBRICATION

# Advantages



## Temperature-independent

Linear discharge during the complete period



## Countdown of remaining running time

Remaining running time in days is shown on the display



## High operating pressure

Up to 60 bar (870 psi)



## Multi-point lubrication


Connection of distributors possible



## Further advantages

- Numerous detailed status messages
- Autarkic operation with battery
- Backlit display

# Technical data

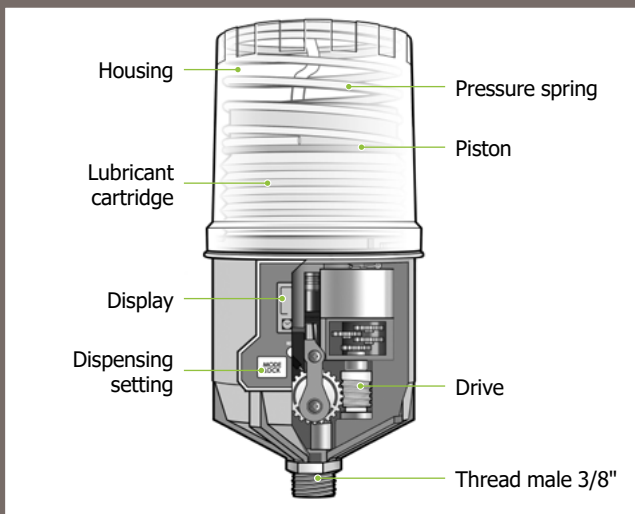

**Drive**  
electromechanical

**Operating pressure**  
max. 60 bar (870 psi)

**Distribution period**  
1-12 months

**Lubricant volume**  
60 / 125 / 250 / 500 ml

**Operating temperature**  
Al battery: +5 °C to +60 °C  
+41 °F to +140 °F  
Li battery: -15 °C to 60 °C  
+5 °F to +140 °F

**Working voltage**  
4.5 V (Al or Li battery)

**Lubricating medium**  
greases up to NLGI 2

**Filling**  
standard filling / special filling

**Dimensions** (height x Ø)  
60/125 ml: 181 x 91 mm  
250 ml: 209 x 91 mm  
500 ml: 260 x 92 mm

**Protection class**  
IP65

# Areas of application



G-LUBE EM B ensures precise lubrication for up to one year and is completely self-sufficient due to its operation on batteries. Thanks to the high operating pressure, it can also be used for several lubrication points if required.



**GRUETZNER**  
AUTOMATIC LUBRICATION

**Gruetzner GmbH**  
Dagobertstr. 15 • 90431 Nuremberg, Germany  
tel. +49 911 277 399 0  
info@G-LUBE.com • [www.G-LUBE.com](http://www.G-LUBE.com)