

# G|LUBE EM B OIL

Electromechanical  
oil lubricator



**GRUETZNER**  
AUTOMATIC LUBRICATION

# Advantages



## Refillable on-site

easy refilling process  
saves time and money



## Temperature-independent

linear discharge during  
the complete period



## Multipoint lubrication

connection of distributors  
possible



## Countdown of remaining running time


remaining running time in days can  
be read on the display at any time



## Further advantages

- extra-large oil reservoir of 500 ml
- numerous detailed status messages via display and LED
- up to 2 years dispensing time adjustable

# Technical data

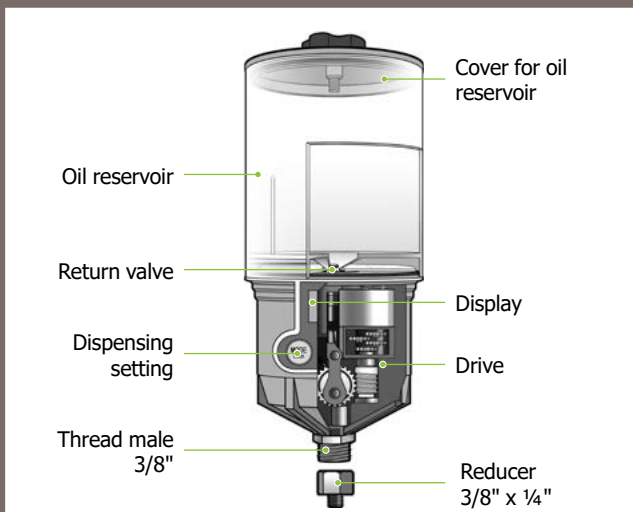

**Drive**  
electromechanical

**Operating pressure**  
max. 10 bar (145 psi)

**Distribution period**  
0.5/1/2/4/6/12/18/24 months

**Lubricant volume**  
500 ml

**Operating temperature**  
Al battery: +5 °C to +60 °C  
(+41 °F to +140 °F)  
Li battery: -15 °C to +60 °C  
(+5 °F to +140 °F)

**Working voltage**  
4.5 V (Al or Li battery)

**Lubricating medium**  
oils > ISO VG 10

**Filling**  
empty

**Dimensions** (height x Ø)  
229 x 99 mm

**Multipoint lubrication**  
up to 10 lubrication points

**Protection class**  
IP54

# Areas of application



As a battery-operated oil lubrication system, G-LUBE EM B OIL is self-sufficient and therefore particularly flexible. With up to 10 bar delivery pressure, lubrication is possible over longer distances.



**GRUETZNER**  
AUTOMATIC LUBRICATION

**Gruetzner GmbH**  
Dagobertstr. 15 • 90431 Nuremberg, Germany  
tel. +49 911 277 399 0  
info@G-LUBE.com • [www.G-LUBE.com](http://www.G-LUBE.com)