

# G|LUBE EM B OIL

## Electromechanical oil lubricator



Digital  
catalogue



CLICK



**GRUETZNER**  
AUTOMATIC LUBRICATION

# Advantages



## Refillable on-site

easy refilling process  
saves time and money



## Temperature-independent

linear discharge during  
the complete period



## Multipoint lubrication

connection of distributors  
possible



## Countdown of remaining running time


remaining running time in days can  
be read on the display at any time



## Further advantages

- extra-large oil reservoir of 500 ml
- numerous detailed status messages via display and LED
- up to 2 years dispensing time adjustable

# Technical data

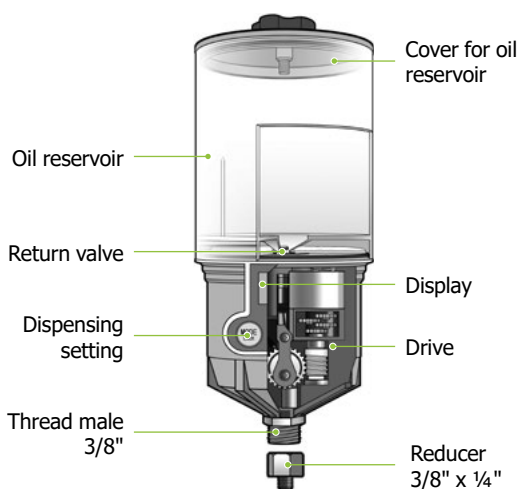

### Drive

electromechanical

### Operating pressure

max. 10 bar (145 psi)

### Distribution period

0.5/1/2/4/6/12/18/24 months

### Lubricant volume

500 ml

### Operating temperature

Al battery: +5 °C to +60 °C  
(+41 °F to +140 °F)

Li battery: -15 °C to +60 °C  
(+5 °F to +140 °F)

### Working voltage

4.5 V (Al or Li battery)

### Lubricating medium

oils > ISO VG 10

### Filling

empty

### Dimensions (height x Ø)

229 x 99 mm

### Multipoint lubrication

up to 10 lubrication points

### Protection class

IP54

# Areas of application



As a battery-operated oil lubrication system, G-LUBE EM B OIL is self-sufficient and therefore particularly flexible. With up to 10 bar delivery pressure, lubrication is possible over longer distances.



**GRUETZNER**  
AUTOMATIC LUBRICATION

**Gruetzner GmbH**  
Dagobertstr. 15 • 90431 Nuremberg, Germany  
tel. +49 911 277 399 0  
info@G-LUBE.com • [www.G-LUBE.com](http://www.G-LUBE.com)