

G|LUBE EM B

Battery-operated high pressure
lubrication system



Digital
catalogue



CLICK



GRUETZNER
AUTOMATIC LUBRICATION

Advantages



Temperature-independent

linear discharge during the complete period



Countdown of remaining running time

remaining running time in days is shown on the display



High operating pressure

up to 60 bar (870 psi)



Multi-point lubrication


connection of distributors possible



Further advantages

- numerous detailed status messages
- autarkic operation with battery
- backlit display

Technical data

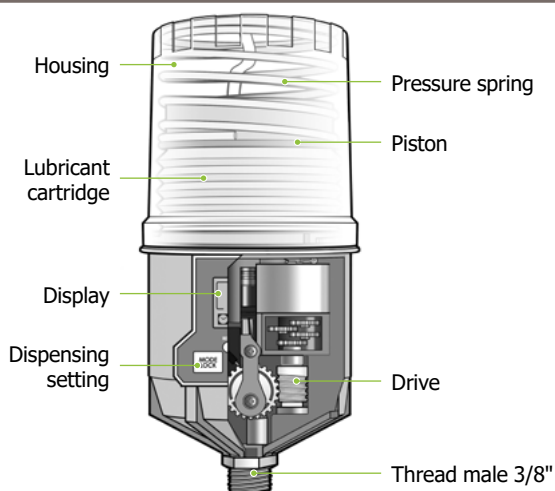

Drive
electromechanical

Operating pressure
max. 60 bar (870 psi)

Distribution period
1-12 months

Lubricant volume
60 / 125 / 250 / 500 ml

Operating temperature
Al battery: +5 °C to +60 °C
+41 °F to +140 °F
Li battery: -15 °C to 60 °C
+5 °F to +140 °F

Working voltage
4.5 V (Al or Li battery)

Lubricating medium
greases up to NLGI 2

Filling
standard filling / special filling

Dimensions (height x Ø)
60/125 ml: 181 x 91 mm
250 ml: 209 x 91 mm
500 ml: 260 x 92 mm

Protection class
IP65

Areas of application



G-LUBE EM B ensures precise lubrication for up to one year and is completely self-sufficient due to its operation on batteries. Thanks to the high operating pressure, it can also be used for several lubrication points if required.



GRUETZNER
AUTOMATIC LUBRICATION

Gruetzner GmbH
Dagobertstr. 15 • 90431 Nuremberg, Germany
tel. +49 911 277 399 0
info@G-LUBE.com • www.G-LUBE.com