

# G|LUBE EM V

Electromechanical lubrication system  
for operation with 9-36 VDC



Digital  
catalogue



CLICK



**GRUETZNER**  
AUTOMATIC LUBRICATION

**Precise lubrication thanks to  
machine-runtime synchronisation**

# Advantages



**Machine-runtime synchronisation**  
allows for precise lubrication at all times



**No batteries required**  
continuous 100% energy supply without follow-up costs for batteries



**High operating pressure**  
up to 60 bar (870 psi)




**Multi-point lubrication**  
connection of distributors possible



**Further advantages**

- power supply possible from 9 to 36 VDC
- 4 sizes for any application setting
- backlit display

## Technical data

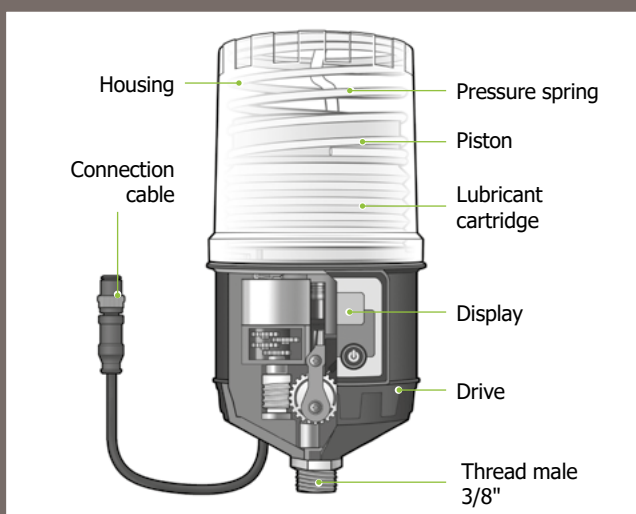

**Drive**  
electromechanical

**Operating pressure**  
max. 60 bar (870 psi)

**Distribution period**  
1-12 months  
*(longer dispensing periods possible with intermittent operation)*

**Lubricant volume**  
60 / 120 / 240 / 480 ml

**Operating temperature**  
-20 °C to +60 °C  
-4 °F to 140 °F

**Working voltage**  
9-36 VDC

**Lubricating medium**  
greases up to NLGI 2

**Filling**  
standard filling / special filling

**Dimensions** (height x Ø)  
60/120 ml: 181 x 91 mm  
240 ml: 208 x 91 mm  
480 ml: 260 x 92 mm

**Protection class**  
IP65

## Areas of application



The G-LUBE EM V can be used flexibly thanks to an operating voltage of 9–36 VDC. Thanks to the machine-operating-time synchronisation, precise, needs-based lubrication is guaranteed. The battery-free operation reduces follow-up costs and is good for the environment.



**GRUETZNER**  
AUTOMATIC LUBRICATION

**Gruetzner GmbH**  
Dagobertstr. 15 • 90431 Nuremberg, Germany  
tel. +49 911 277 399 0  
info@G-LUBE.com • [www.G-LUBE.com](http://www.G-LUBE.com)