

# G LUBE

## Gas-driven lubricator



Digital  
catalogue



 CLICK



**GRUETZNER**  
AUTOMATIC LUBRICATION

# Advantages



## Reliable

Gas production ( $N_2$ ) through electronically controlled chemical reaction, reliable despite changing ambient temperatures



## Economical

Lower lubrication costs, lower lubricant consumption, longer machine service life



## Eco-friendly

Eco-friendly product, easy disposal



## Flexible

3 sizes, setting can be changed anytime, self-filling possible, no tools required for activating



## Further advantages


- Certificated



IP68



# Technical data

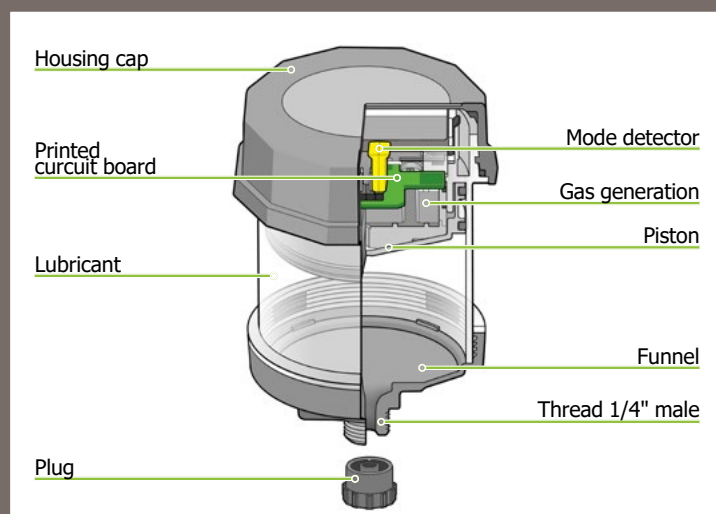

## Drive

Gas driven ( $N_2$ )

## Operational voltage

3 V (battery)

## Operating pressure

Max. 5 bar (73 psi)

## Filling

empty / standard filling / special filling

## Lubricant volume

60 ml / 120 ml / 240 ml

## Dimensions (height x Ø)

60 ml: 91 x 77 mm

120 ml: 111 x 77 mm

240 ml: 156 x 77 mm

## Operating temperature

-20 °C to +55 °C

-4 °F to +131 °F

## Lubricating medium

Oils and greases up to NLGI 2

## Certifications

IP68, CE, ATEX

## Distribution period

1, 3, 6, 9 & 12 months

# Applications



G-LUBE is applicable in nearly all branches and areas. Activating does not require any tools. For an indirect installation we recommend our wide range of accessories.



**GRUETZNER**  
AUTOMATIC LUBRICATION

**Gruetzner GmbH**  
Dagobertstr. 15 • 90431 Nuremberg, Germany  
tel. +49 911 277 399 0  
info@G-LUBE.com • [www.G-LUBE.com](http://www.G-LUBE.com)