

SOLO LUBE

Precise electromechanical
single-point lubrication



Digital
catalogue



GRUETZNER
AUTOMATIC LUBRICATION

Advantages



Easy handling

No tools required



Status reports

Optical function and fault indication by LEDs



Outdoor use

Temperature-independent flow rate



24 V adapter

retrofitable, no follow-up costs



Further advantages

- High reliability
- 3 sizes available



Technical data

Battery

Dispensing setting

Drive

Pressure plate


Lubricant cartridge

Piston

Lubricant

Outlet 1/2"

Reducer 1/4"

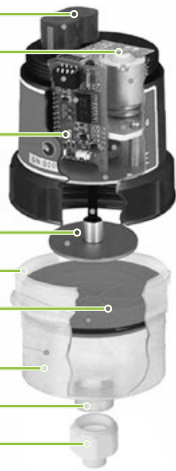

Drive

electromechanical

Operating pressure

max. 7.5 bar (109 psi)

Distribution period

1-12 months

Lubricant volume

60 ml / 150 ml / 250 ml

Operating temperature

-20 °C to +60 °C (-4 °F to +140 °F)

Working voltage

6.0 V (Li battery) or
24 V (adapter)

Lubricating medium

oils and greases up to NLGI 2

Filling

empty/standard filling/special filling

Dimensions (height x Ø)

60 ml: 138 x 84 mm

150 ml: 151 x 84 mm

250 ml: 183 x 96 mm

Performance monitoring

green/red LED

Areas of application



Its precise delivery system makes Sololube equally suitable for the automatic lubrication of roller and friction bearings, gear racks, open transmissions or chains.



GRUETZNER
AUTOMATIC LUBRICATION

Gruetzner GmbH
Dagobertstr. 15 • 90431 Nuremberg, Germany
tel. +49 911 277 399 0
info@G-LUBE.com • www.G-LUBE.com