

LUBRICAJO B

Autonomous, reusable
lubrication system



Digital
catalogue



GRUETZNER
AUTOMATIC LUBRICATION

Advantages



Autarkic operation
battery-operated



Multi-point lubrication
connection of distributors possible



Outdoor use
dust tight and water protected




Status reports
optical function and fault
indication by LEDs



Further advantages

- flexible deployment periods: 1 week to 16 months
- powerful pump up to 25 bar (363 psi)
- concealed controls – protected against incorrect operation

Technical data

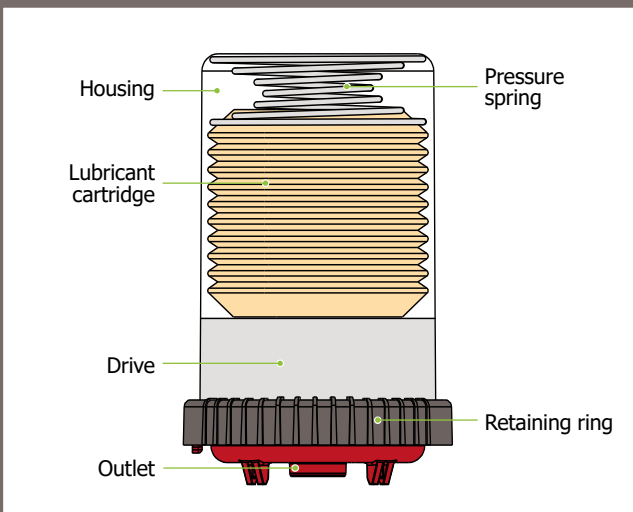

Drive
electromechanical

Operating pressure
max. 25 bar (363 psi)

Distribution period
1 week to 16 months

Lubricant volume
120 / 240 / 480 ml

Operating temperature
Al battery: 0 °C to +50 °C
+32°F to +122 °F
Li battery: -15 °C to 50 °C
+5 °F to +122 °F

Working voltage
4.5 V (Al or Li battery)

Lubricating medium
greases up to NLGI 2

Filling
standard filling / special filling

Dimensions (height x Ø)
120 ml: 133 x 101 mm
240 ml: 164 x 101 mm
480 ml: 245 x 101 mm

Protection class
IP66

Areas of application



With its IP66 protection class, the Lubricajo B resists the penetration of dust and moisture and guarantees reliable lubrication even in demanding environments.



GRUETZNER
AUTOMATIC LUBRICATION

Gruetzner GmbH
Dagobertstr. 15 • 90431 Nuremberg, Germany
tel. +49 911 277 399 0
info@G-LUBE.com • www.G-LUBE.com