

LUBRICAJO V

Powerful lubrication system
with 24-volt drive



Digital
catalogue



GRUETZNER
AUTOMATIC LUBRICATION

Advantages



No batteries required

continuous 100% energy supply without follow-up costs for batteries



3 sizes

the right size for every application



Flexible deployment periods

1 week to 16 months



Multi-point lubrication


connection of distributors possible



Further advantages

- optical function and fault indication by LEDs
- powerful pump up to 25 bar (363 psi)
- outdoor use: Dust tight and water protected (IP66)

Technical data

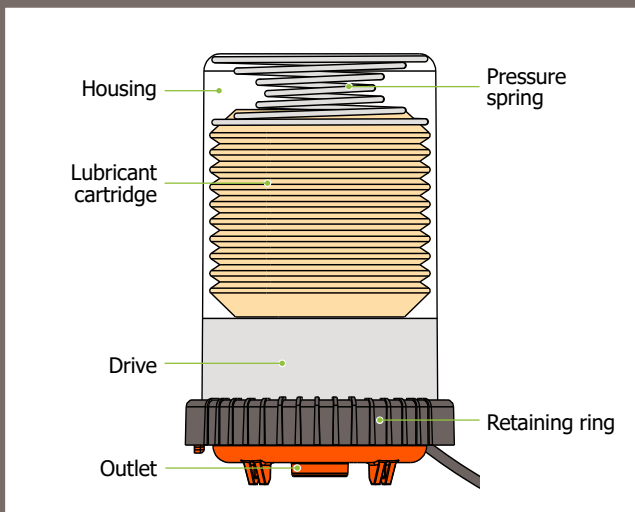

Drive
electromechanical

Operating pressure
max. 25 bar (363 psi)

Distribution period
1 week to 16 months

Lubricant volume
120 / 240 / 480 ml

Operating temperature
-15 °C to +50 °C
+5 °F to +122 °F

Working voltage
24 VDC

Lubricating medium
greases up to NLGI 2

Filling
standard filling / special filling

Dimensions (height x Ø)
120 ml: 133 x 101 mm
240 ml: 164 x 101 mm
480 ml: 245 x 101 mm

Protection class
IP66

Areas of application



Thanks to its IP66 protection class, the Lubricaja V can be used flexibly even in humid or dusty environments. The proven technology with a battery-free drive reduces follow-up costs and protects the environment.



GRUETZNER
AUTOMATIC LUBRICATION

Gruetzner GmbH
Dagobertstr. 15 • 90431 Nuremberg, Germany
tel. +49 911 277 399 0
info@G-LUBE.com • www.G-LUBE.com