


## 4. Mounting

**Direct mounting** is always preferred.

If the application does not allow direct mounting, remotely assemble the unit using appropriate accessories and keep the distance from the lube point as short as possible (5 metres maximum). For **remote installations** use a 6 mm (inner diameter) tube pre-filled with the same or compatible grease as the grease contained in the unit.



**Multiple point installation** is possible using a progressive distributor. Do not block any connections to the progressive distributor. Instead use a suitable distributor in accordance with the number of lubrication points. Keep the distance between the distributor and the lubrication unit as short as possible.

### NOTE

The Lubricajo LUX V must always be installed in a vertical position. Installing the unit in a non-vertical position may cause damage to the automatic lubricator and your equipment. Incorrect alignment will invalidate the warranty and may lead to safety risks.

## 5. Cable assignment

Connect the cable (6 x 0.25mm<sup>2</sup> / 6DIN M16) to an external power supply with a voltage of 9-36 V DC.


Ensure that the cables are connected correctly.

Colour	Assignment
red	Input signal (Optocoupler Input +)
black	Input signal (Optocoupler Input -)
yellow	Power supply (9 - 36 V DC)
blue	Output signal (Optocoupler Collector)
grey	Output signal (Optocoupler Emitter)
green	Power supply (0 V DC)


## 6. LED signals

Signals via LED	
	<ul style="list-style-type: none"> <li>The test run was activated using the button.</li> <li>The pumping cycle was completed successfully.</li> </ul>
	<ul style="list-style-type: none"> <li>Lubricant cartridge empty.</li> </ul>
	<ul style="list-style-type: none"> <li>The gearbox/motor is damaged or defective.</li> <li>The lubrication point or lubrication line may be blocked.</li> </ul>

## 7. Start test run

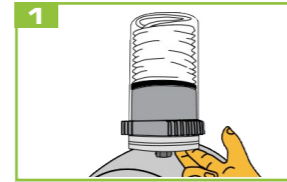

Press the button on the bottom of the LUX base to run a test cycle. Grease will be dispensed during the test cycle.

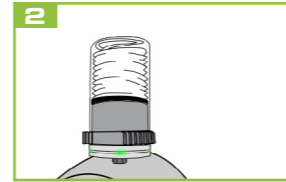

After dispensing, the LUX base flashes green during normal operation. For information on other colours, see „6. LED signals“.

## 8. Input signal

A dispensing cycle is triggered by a signal (**HIGH 24 V DC**) lasting **between 1 and 5 seconds** from the PLC. There must be a pause of at least 25 seconds between two signals from the PLC. We recommend a **pause of 15 minutes** between two signals, as it takes longer for the full quantity to be dispensed when using high-viscosity greases.

**Input signal (PLC):**




**Output signal "busy" while dispensing:**




**Pressure at Outlet:**




**Output signal "Malfunction":**



## 9. Changing the cartridge

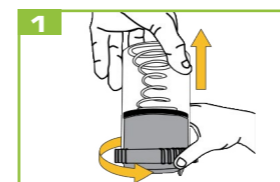

Turn the retaining ring counterclockwise and remove the housing. Remove the empty cartridge. Replace the battery every time you change the cartridge.

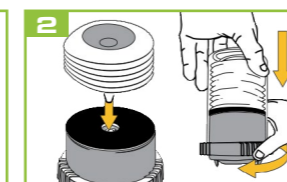

Place the new cartridge in position and place the housing on the drive unit. Secure the housing by turning the retaining ring clockwise on the drive unit.

## 10. Important information

- The lubricant dispenser is **not** suitable for use with oil.
- Minimize tube resistances. Narrow passages and right angles should be avoided.
- During operation of the device a visual inspection of the device as well as of the lubrication point must be carried out regularly.
- Product warranty is limited to original defects in material and workmanship and does not cover any collateral damage due to mishandling, abuse and/or any other inappropriate use of the device.
- The maximum storage temperature should not exceed +40 °C (+104 °F). Higher temperatures decrease the battery's lifespan. Batteries may be stored for max. 1 year. The lubricator has to be activated within two years from receiving.


# LUBRICAJO

## LUX V

User manual  
LJ-EM-LX-V



# 1. Product details

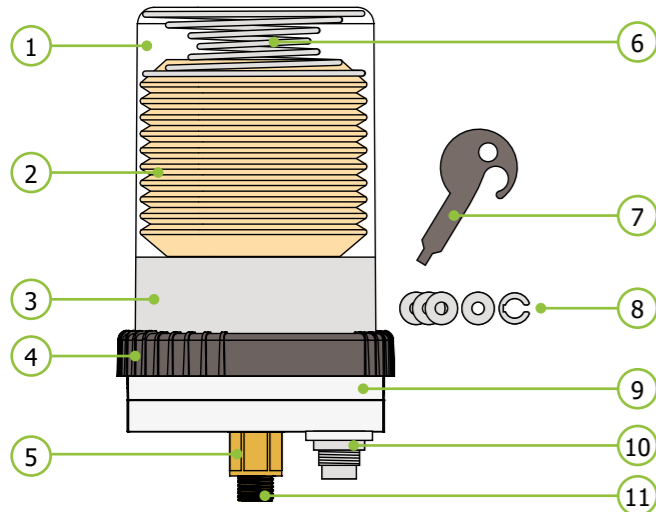


No.	Description	No.	Description
1	Housing	7	Setting key (setting pause time)
2	Lubricant cartridge	8	Stroke washers, circlip (sold separately, Art. no. JAT9052)
3	Drive	9	LUX base with 360° LEDs
4	Retaining ring	10	Connector plug
5	Outlet	11	Thread male 1/4"

# 2. Technical data

Housing		
Operating temperature	-15 ... +50*	°C
Dimensions (height x Ø)	120 ml: 151 x 101 240 ml: 182 x 101 480 ml: 263 x 101	mm
Lubricant and hydraulic		
Lubricating medium	greases up to NLGI class 2	
Lubricant volume	120/240/480	ml
Number of lubrication points	up to 12 (with progressive distributors)	
Max. operating pressure	25	bar
Grease delivery	per stroke 0,6 (with stroke washers, reduction down to 0.34 ml possible)	ml
Distribution period	0,25 ... 48 months	
Electrics		
Working voltage (DC)	6 - 36	V
Power supply	External (6DIN M16 connection)	
Protection class	IP64	

\* The stated value is down to the individual application and may extensively differ in some cases (depending on the lubricant and further conditions).

# 3. Installation




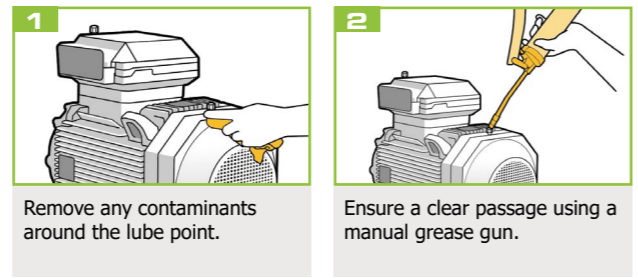


**NOTE** The reliable operation depends on completely filled grease lines. Ensure that the grease lines are not blocked. Therefore, grease them before starting the device. Remove any hardened grease by purging the lube point with a manual grease gun.



The grease in the equipment and the grease in the unit should be the same or compatible.



**NOTE** Remove the grease nipple and install proper connectors.

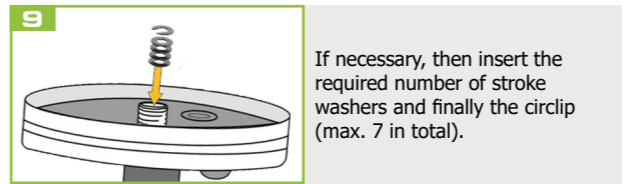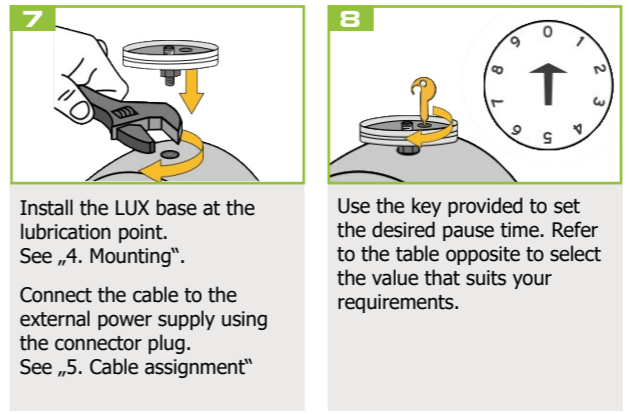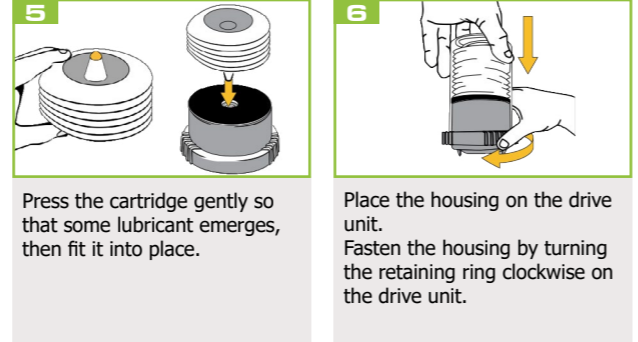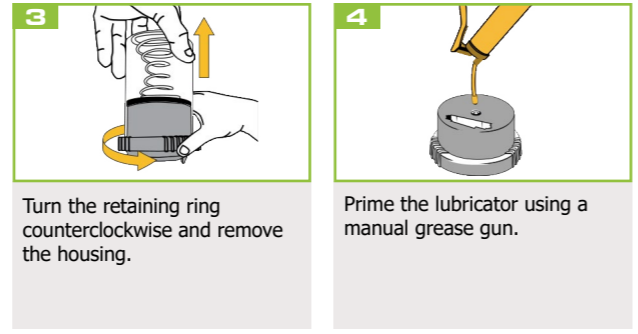

**NOTE** Without stroke washers (at full piston stroke), Lubricajo LUX V delivers 0.6 ml of lubricant per stroke. Each additional stroke washer in the ring adapter reduces the stroke volume by approximately 0.0375 ml.

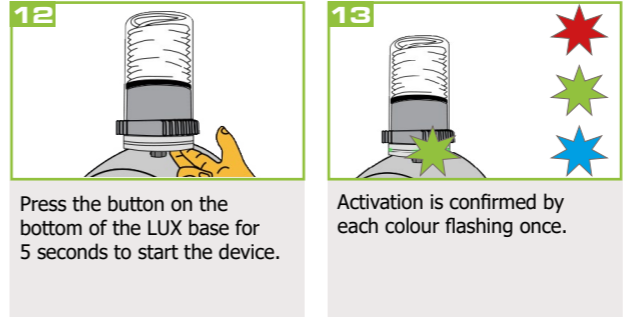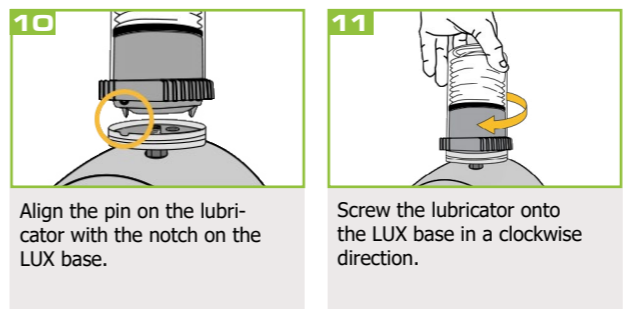

Dial position	Pause time	0		max. dispensing time	Stroke washers O and circlip C : Setting the quantity of lubricant (reducing the quantity of lubricant increases the dispensing time)														
		120 ml	240 ml		only C	1 O + C	2 O + C	3 O + C	4 O + C	5 O + C	6 O + C	7	8	9					
	48 hours	12 mon.	External (PLC)	0.3 ml/day	0.28 ml/day	0.26 ml/day	0.24 ml/day	0.22 ml/day	0.2 ml/day	0.18 ml/day	0.17 ml/day	0.6 ml/day	0.9 ml/day	1.2 ml/day	1.8 ml/day	2.4 ml/day	3.6 ml/day	7.2 ml/day	14.4 ml/day
	24 hours	6 mon.		0.6 ml/day	0.56 ml/day	0.52 ml/day	0.49 ml/day	0.45 ml/day	0.41 ml/day	0.37 ml/day	0.34 ml/day	0.6 ml/day	0.9 ml/day	1.2 ml/day	1.8 ml/day	2.4 ml/day	3.6 ml/day	7.2 ml/day	14.4 ml/day
	16 hours	4 mon.		0.9 ml/day	0.84 ml/day	0.79 ml/day	0.73 ml/day	0.67 ml/day	0.62 ml/day	0.55 ml/day	0.5 ml/day	0.9 ml/day	1.2 ml/day	1.8 ml/day	2.4 ml/day	3.6 ml/day	5.4 ml/day	10.8 ml/day	21.6 ml/day
	12 hours	3 mon.		1.2 ml/day	1.12 ml/day	1.04 ml/day	0.98 ml/day	0.9 ml/day	0.82 ml/day	0.74 ml/day	0.68 ml/day	1.2 ml/day	1.8 ml/day	2.4 ml/day	3.6 ml/day	5.4 ml/day	8.1 ml/day	16.2 ml/day	32.4 ml/day
	8 hours	2 mon.		1.8 ml/day	1.7 ml/day	1.62 ml/day	1.46 ml/day	1.35 ml/day	1.23 ml/day	1.1 ml/day	1 ml/day	1.8 ml/day	2.4 ml/day	3.6 ml/day	5.4 ml/day	8.1 ml/day	12.15 ml/day	24.3 ml/day	48.6 ml/day
	6 hours	1.5 mon.		2.4 ml/day	2.2 ml/day	2.1 ml/day	1.95 ml/day	1.8 ml/day	1.65 ml/day	1.5 ml/day	1.35 ml/day	2.4 ml/day	3.6 ml/day	5.4 ml/day	8.1 ml/day	12.15 ml/day	18.225 ml/day	36.45 ml/day	72.9 ml/day
	4 hours	1 mon.		3.6 ml/day	3.4 ml/day	3.15 ml/day	2.92 ml/day	2.7 ml/day	2.47 ml/day	2.2 ml/day	2.02 ml/day	3.6 ml/day	5.4 ml/day	8.1 ml/day	12.15 ml/day	18.225 ml/day	27.3375 ml/day	54.675 ml/day	109.35 ml/day
	2 hours	0.5 mon.		7.2 ml/day	6.7 ml/day	6.3 ml/day	5.85 ml/day	5.4 ml/day	4.95 ml/day	4.5 ml/day	4.05 ml/day	7.2 ml/day	10.8 ml/day	16.2 ml/day	24.3 ml/day	36.45 ml/day	54.675 ml/day	81.01125 ml/day	121.516875 ml/day
	1 hour	0.25 mon.		14.4 ml/day	13.5 ml/day	12.6 ml/day	11.7 ml/day	10.8 ml/day	9.9 ml/day	9 ml/day	8.1 ml/day	14.4 ml/day	21.6 ml/day	32.4 ml/day	48.6 ml/day	72.9 ml/day	109.35 ml/day	163.975 ml/day	245.9625 ml/day