

LUBRICAJO

Electrochemical lubricator



Digital
catalogue



CLICK



GRUETZNER
AUTOMATIC LUBRICATION

Advantages



Dispensing cycles

1 to 12 months (stepless setting)
can be modified anytime



Compact design


installation in confined spaces
possible



Further advantages

- easy monitoring of the dispensing process thanks to the transparent housing
- special fillings available

Technical data

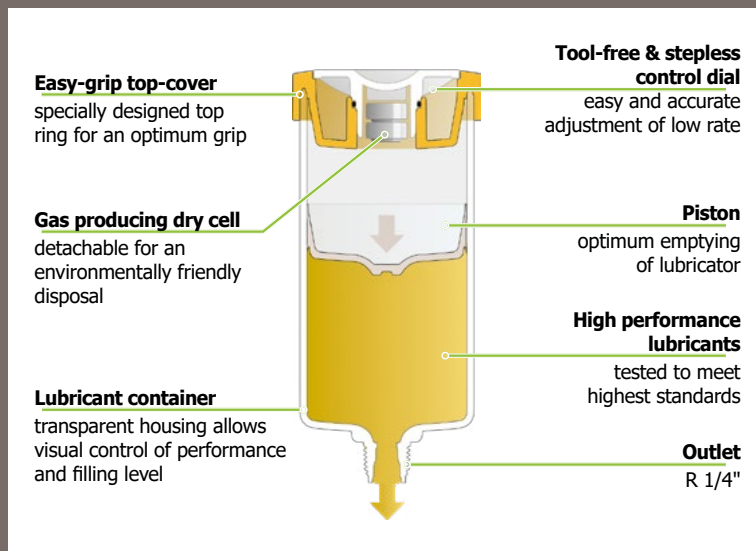

Drive

electrochemical

Operating pressure

max. 5 bar (73 psi)

Distribution period

1-12 month (stepless)

Lubricant volume

60 ml / 125 ml

Operating temperature

-20 °C to +60 °C
(-4 °F to +140 °F)

Weight

empty: ~ 69 g / ~ 82 g
filled: ~ 120 g / ~ 196 g

Lubricating medium

oils and greases up to NLGI 2

Dimensions (height x Ø)

60 ml: 8,6 cm x 5,0 cm
125 ml: 11,8 cm x 5,0 cm

Certifications

IP68



no tools required

Areas of application



Lubricajo is a reliable and economic solution for the continuous supply of lubrication points with grease or oil and uses a gas cell technology which has proven its worth millions of times over in practice. The units are ready-to-use straight from the box and filled with a wide range of high performance lubricants; special fillings are also available. Tool-free activation and time-setting allow an easy and accurate adjustment of the lubrication flow.



GRUETZNER
AUTOMATIC LUBRICATION

Gruetzner GmbH
Dagobertstr. 15 • 90431 Nuremberg, Germany
tel. +49 911 277 399 0
info@G-LUBE.com • www.G-LUBE.com