# Gruetzner Lubricajo App

## User Manual




GRUETZNER
AUTOMATIC LUBRICATION

# Gruetzner Lubricajo App

## System requirements

| | Apple | Other brands |
|---|---|---|
| Required operating system | iOS 12.2 (or later) | Android 7.0 (or later) |
| | iPad OS 12.2 (or later) | |
| | macOS 11.0 (or later) and a Mac with Apple M1 (or later) | |
| Available space needed | 103 MB | 102 MB |
| Compatible with | Lubricajo B BT (LJ-BT), Lubricajo LORA (LJ-LORA) | |

## Bluetooth Connectivity

| Bluetooth | |
|---|---|
| Version | 5.2 |
| Frequency | 2,4 GHz |
| Range (indoor, office environment) | 20 m |
| Range (outdoor, line of sight) | 100 m |

## Further information

The **Gruetzner Lubricajo** app is required to control the **Lubricajo B BT** (LJ-BT) and **Lubricajo LORA** (LJ-LORA).

You can find detailed information and the digital user guide on our website. Simply scan the QR code or directly click on it.

You can also download the **Gruetzner Lubricajo** app from there. Please also read the user manuals for LJ-BT and LJ-LORA.

**Gruetzner GmbH**
Dagobertstr. 15
D-90431 Nürnberg

Tel. 0911 277 399-0
Fax 0911 277 399-99
sales@G-LUBE.com
www.G-LUBE.com

Revision: 0 / 28.10.2026

# Gruetzner Lubricajo App

## 1. Home screen




On the '**Home**' screen, you will find the menu options '**Lubricators**', '**Identify**' and '**Settings**'.

## 2. Lubricators

All devices within range are displayed here.

To change the view, click on the icon in the top right-hand corner.

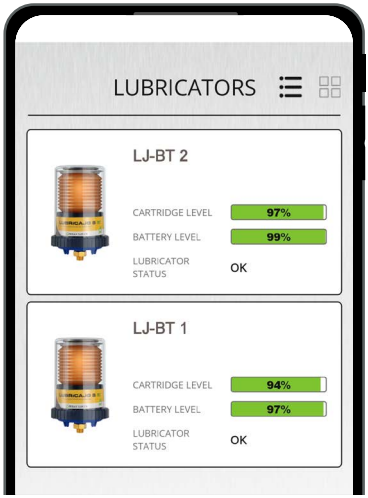




### 2.1 Device details

When you launch the app for the first time, allow it to search for Bluetooth devices.

Select a device from the 'Lubricators' menu to view the device details.

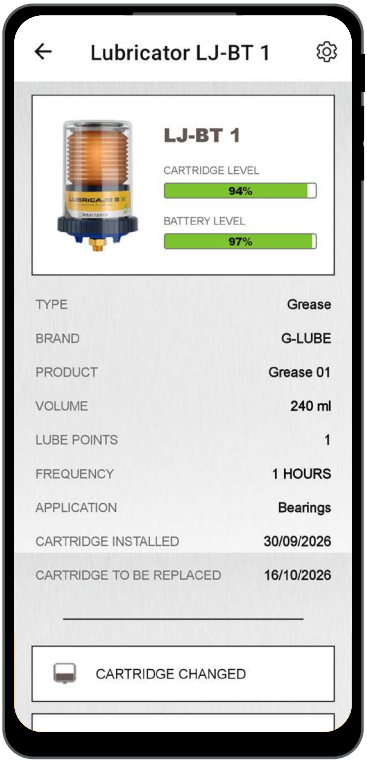


The top section shows the device's current settings.

Scroll down to view the action buttons.

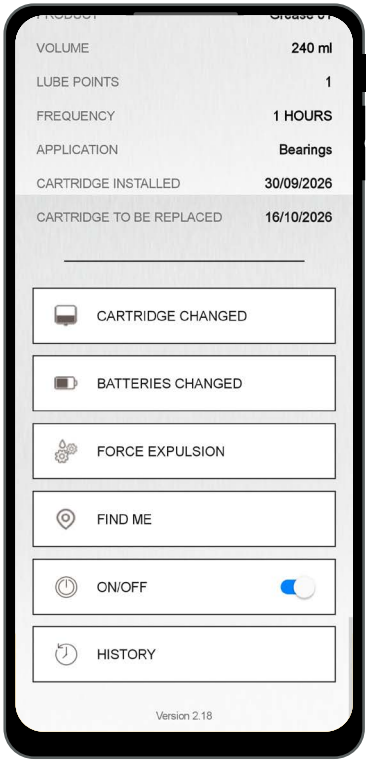


**Cartridge changed:** Press this button to reset the cartridge status. This step is required after every cartridge replacement!

**Batteries changed:** Press this button to reset the battery status. This step is required after every cartridge replacement!

**Force expulsion:** This button immediately triggers a grease dispensing and resets the device's timer. (Example: If the frequency is set to 1 hour, the next automatic dispensing will take place exactly 1 hour after the forced dispensing.)

**Find me:** This button causes the housing LEDs to flash alternately for easy identification.

**ON/OFF:** This button switches the device on or off. In 'OFF' mode, no lubricant is dispensed, but the device remains visible in the app. Please confirm the status change in the following window.

**History:** Here you will find a chronological list of all dispensations carried out by the device.

### 2.2 Device configuration

To set up the device, click on the icon in the top right-hand corner.

**Name:** Enter a name for the selected device.

**Volume:** Set the cartridge size for the device.

**Type:** Currently, only models designed for dispensing grease are available.

**Brand /Product:** Enter the brand and name of the grease being used.

**Lube points:** Specify how many lubrication points are to be lubricated.

**Application:** Specify the application for which the device is being used.

**Reducer:** If you have used stroke washers, specify the number to enable the correct calculation of the lubricant quantity.

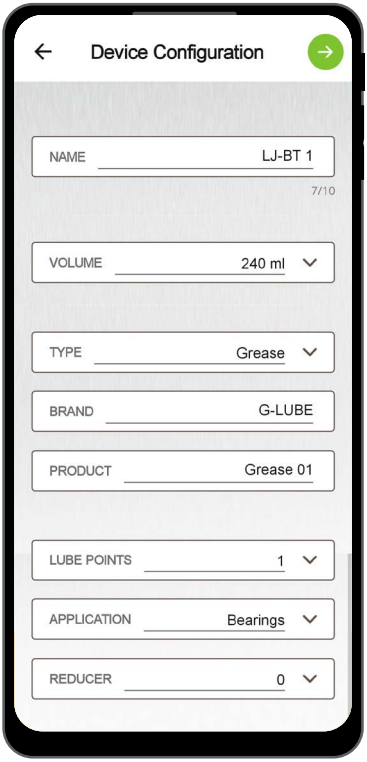


To go to the second page of the device settings, press the icon.




Use the dial to select the frequency at which the lubricant should be dispensed. The daily lubricant quantity is calculated automatically.

If you select the icon, you can specify a custom dispensing interval or daily quantity.

To save the settings, click on the icon in the top right-hand corner.

## 3. Identify

When you launch the app for the first time, allow it to access the camera.

In this menu option, scan a device's QR code to go directly to its settings menu.




## 4. Settings

Here you can change the app's language, contact support, or visit the downloads section or the Lubricajo EM page at www.G-LUBE.com.

